

MC 2000

STEREO POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. Illuminated left and right POWER OUTPUT meters (linear WATTS, DECIBELS and BIAS SET). ⚡ METER switch: LIGHTS OFF, WATTS or HOLD. Remote ON indicator light. POWER switch: OFF, REMOTE or ON. Tubes can be seen through the clear rectangle above the meters. Gold plated handles.



BACK PANEL: Stainless steel chassis with titanium gold finish. RIGHT audio INPUT: UNBALANCED and BALANCED. Gold plated RIGHT channel OUTPUT terminals for 2, 4, or 8 Ω speakers. POWER CONTROL: IN and OUT. Right channel FUSE 2. Power cord receptacle. Left channel FUSE 1. INPUT switch: 2.5V or 1.2V. MODE switch: BALANCED or UNBALANCED. Gold plated LEFT channel OUTPUT terminals for 2, 4, or 8 Ω speakers. LEFT audio INPUT: UNBALANCED and BALANCED.

SIDE PANELS: (behind covers) Left side: BIAS ADJUSTment: potentiometers (with momentary push-buttons): V4+6L and V5+7L. Right side: BIAS ADJUSTment: potentiometers (with momentary push-buttons): V5+7R and V4+6R.

TUBES: 8-KT88/6550 output, 4-12AX7A, 2-12AT7. Solid state rectifier bridges.


MC 2000

STEREO POWER AMPLIFIER

McIntosh

The Compendium

SPECIFICATIONS: 130w/ch into 2, 4 or 8 ohms. Response 20-20kHz (+0 -0.25dB). Distortion 0.5%. Noise and hum -100dBA. Damping factor greater than 18. Input impedance 20k unbalanced, 40k balanced. Input sensitivity switched 1.5V or 2.5V for rated power.

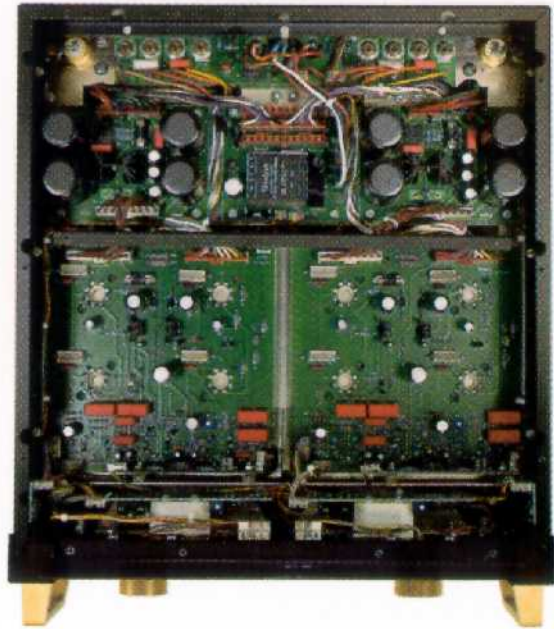

MC 2000 - Sold in 1999. S/N: SAC001~????? (559 UNITS)

Size 11"H, 17-3/4"W and 18-3/4"D. Weight 135 lb. **\$15,000.00**