

# C 30

## STEREO PRE-AMPLIFIER

# McIntosh

## The Compendium



**FRONT PANEL:** Glass with illuminated teal/gold nomenclature. INPUT SELECTOR: AUX, VCR, TV, LASER, CD, TUNER, PHONO. EQUALIZER FREQUENCY controls: 30, 150, 500, 1500 and 10K, HEADPHONE VOLUME, VOLUME. ⚡ MODE SELECTOR: L TO L+R, R TO L+R, STEREO REVERSE, STEREO, MONO (L+R), L+R TO L and L+R TO R. TAPE 2 INPUT and OUTPUT jacks. Pushbutton switches (with indicator lights): TAPE 1 MONITOR: IN or OUT, TAPE 2 MONITOR: IN or OUT, TAPE COPY: 1▶2, TAPE COPY: 2▶1. LF-HF FILTER: IN or OUT. SPEAKER/OUTPUT 1: IN or OUT, SPEAKER/OUTPUT 2: IN or OUT. POWER: ON or OFF. HEADPHONES jacks. Concentric BALANCE: L to R / LOUDNESS: FLAT to MAX. PANLOC buttons.



**BACK PANEL:** OUTPUTS: 2, 1, MAIN, LINE, TAPE 1, TAPE 2. EXTERNAL PROCESSORS: MAIN: TO and FROM, TAPE: TO and FROM. INPUTS: TAPE 1, AUX, VCR, TV LASER, CD, TUNER, PH. ⚡ Power cord. FUSE. TURNTABLE POWER: AUTO-MANUAL switch, UNSWITCHED AC outlet (TURNTABLE POWER), AUTO-ON SENSITIVITY: MIN to MAX. 6 SWITCHED AC outlets. speaker control relay socket. GROUND binding post. Panloc mounting.

**SPECIFICATIONS:** Response 20-20kHz (+0 -0.5dB). Distortion 0.007%. Noise and hum - 100dB aux, -90dB phono. Output rated 2.5V. Maximum output 10V Input sensitivity and impedance: high level 0.20V (10V max) at 22k, phono 2mV (100mV max) at 47k and 65pF. Program equalizer: 30, 150, 500, 1500 and 10,000Hz boost or cut 12dB. LF filter 50Hz at 12dB/octave. HF filter 7kHz at 12dB/octave. Voltage gain 22dB high level, 62dB phono.




# C 30

## STEREO PRE-AMPLIFIER

# McIntosh

## The Compendium

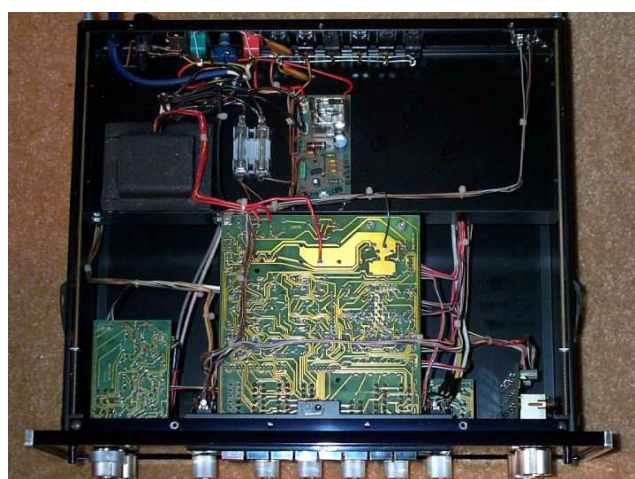

**C 30** - Sold from 1985 - 1987. S/N: DM1001~DM2800 (1,799 UNITS)

Size 5-7/16"H, 16"W and 13"D behind panel. Weight 18 lb. **\$1,649.00**