

# C 8

## MONAURAL PRE-AMPLIFIER

# McIntosh

## The Compendium



EARLY



LATE

**FRONT PANEL:** Brass finish. RUMBLE FILTER: 1 to 5. RECORD COMPENSATOR: turnover (bass) 950, 750, 580, 400, 280, rolloff (treble) 5, 10, 15, 20, 25. AURAL COMP: 1 to 5. ⚡ SELECTOR: (EARLY): 1, 2, 3, 4 or 5; (LATE): TAPE, TUNER, MIC, PHONO 1, PHONO 2. BASS boost: 0 to 5, cut: 0 to 5. Power indicator light. TREBLE boost: 0 to 5, cut: 0 to 5. VOLUME: 1 to 10 with on-OFF switch.



EARLY



LATE

**(EARLY) BACK PANEL:** Octal power and audio output socket. Tube cover. INPUTS: 4 (high level phono), 5 (low level phono). Level controls: 1 and 2. INPUTS: 1 (tape), 2 (tuner). ⚡ 3 switched AC outlets. OUTPUTS: MAIN and AUX. Power cord. Input 5 selector switch: F.M. or MAG. Input 5 LOAD control: 12, 27, 37, 47, 60, 73, or 88. Level control: 3. INPUT 3 (mic).

**(LATE) BACK PANEL:** Octal power and audio output socket. OUTPUTS: TAPE and MAIN. Tube cover. PHONO 2 LOAD control: F.M., 2K, 7K, 36K, 47K, 52K. ⚡ 3 switched AC outlets. Power cord. INPUTS (with level controls): TAPE, TUNER, MIC, PHONO 1 and PHONO 2.

**SPECIFICATIONS:** Powered by **McIntosh** tube amplifiers. Response 20-20kHz. Distortion 0.3%. Noise and hum -80dB high level, 2uV phono. Output; main 2.5V, 0.5V tape. Input sensitivity and impedance: high level 0.5V at 500k, phono 1 (5mV at 100k), phono 2 (5mV at variable 6.8k to 52k).

**TUBES:** 3-12AX7. Solid state rectifier.

# C 8




## MONAURAL PRE-AMPLIFIER

# McIntosh

## The Compendium



EARLY

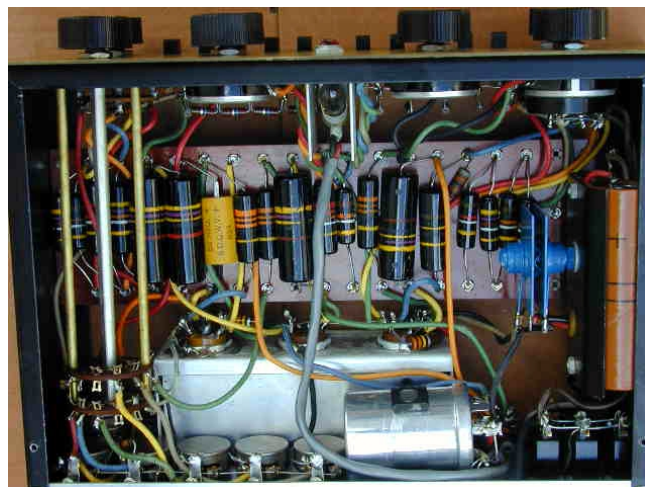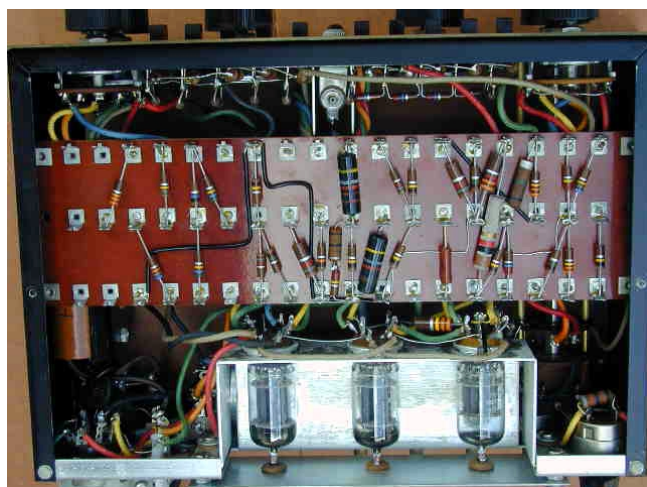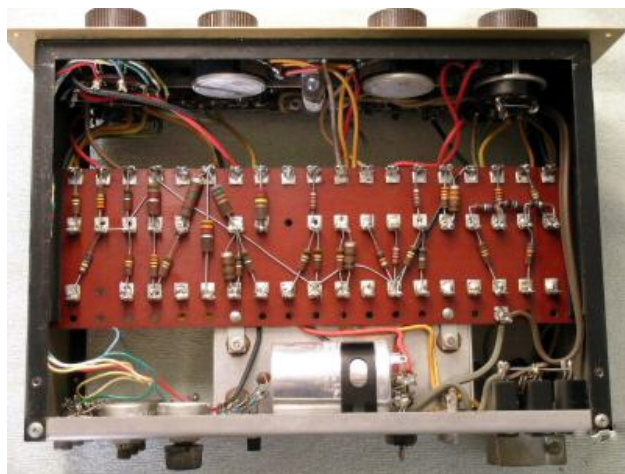

LATE



EARLY



LATE

**C 8** - Sold from November 1955 - February 1959. S/N: 5,000~15,658 & 1B001~4B601 (14,257 UNITS)

Size: 3-9/16"H, 10-1/8"W and 9"D. Weight 6 lb. **\$88.50**. **C 8B** (C8 with blond cabinet **\$98.50**). **C 8M** (C8 with mahogany cabinet **\$98.50**)