

MC 225

STEREO POWER AMPLIFIER

McIntosh

The Compendium



CONTROLS & CONNECTORS: Chrome/black chassis. Line OUTPUTS octal socket for 70V/600 OHM output. Speaker OUTPUT: LEFT and RIGHT barrier strips for 4, 8 and 16 OHMS. STEREO-MONO switch. LEFT and RIGHT/MONO GAIN controls. ⚡ Power cord. FUSE. 117V AC 400 WATTS outlet. Left and Right audio INPUTS.



SPECIFICATIONS: 25w/ch stereo, 50w mono. Response 18-30kHz (+0 -0.1dB). Distortion 0.5%. Noise & hum -90dB. Output impedance 4, 8, 16, 150, 200 and 600 ohms. 600 ohm balanced to ground and center tapped. (2, 4, 8 and 16 ohms in mono). Output voltages 25 and 70.7V. Internal impedance less than 10% of rated impedance. Input impedance 250k. Input sensitivity 0.5V (2.0V with gain controls at dot indicator).

TUBES: 4-7591 output, 12AX7, 2-12AU7, 2-12BH7. Solid state rectifier.




MC 225

STEREO POWER AMPLIFIER

McIntosh

The Compendium

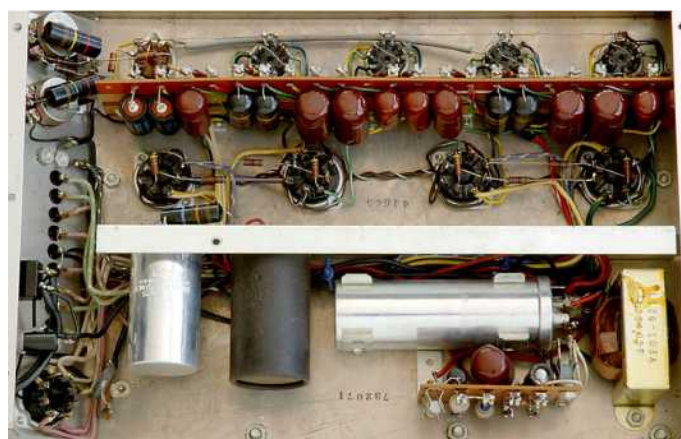

MC 225 - Sold from June 1961 - August 1970. S/N: 100C1~700C6 (5,591 UNITS)

Size 7"H, 9-1/8"W and 14-1/2"D. Weight 34 lb. **\$198.00**