

MC 2600

STEREO POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Black anodized aluminum panel. Illuminated LEFT and RIGHT POWER OUTPUT meters (linear WATTS or DECIBELS). ⚡ Left and right POWER GUARD lights. ⚡ LEFT GAIN control. METER switch: WATTS or HOLD. SPEAKER switch: OFF or ON. RIGHT/MONO GAIN control. HEADPHONES jack. POWER switch: ON or OFF. Handles.




BACK PANEL: Dual cooling fans. ⚡ Power cord receptacle. LEFT and RIGHT speaker OUTPUT barrier strips. UNBALANCED audio INPUTS: LEFT and RIGHT/MONO. BALANCED audio INPUTS: LEFT and RIGHT/MONO. MODE switch: STEREO, MONO BRIDGE or MONO PARALLEL. INPUT SENSITIVITY switch: 1.4V or 2.5V.

SPECIFICATIONS: 600w/ch. (1200w mono). Response 20-20kHz (+0 -0.25dB). Distortion 0.005%. Noise and hum -105dBa. Output impedance 2, 4, and 8 ohms stereo. (1, 2, 4, 8 and 16 ohms in mono). Damping factor 40 or greater. Input impedance 20k unbalanced, 40k unbalanced. Input sensitivity 1.4v or 2.5v. Sentry Monitor. Power Guard.

MC 2600

STEREO POWER AMPLIFIER

McIntosh
The Compendium

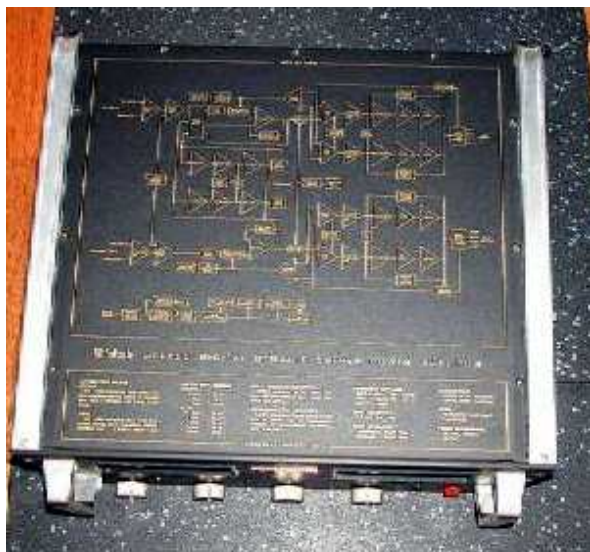

MC 2600 - Sold from 1990 - 1995. S/N: FS1001~?????

Size 19" rack mounting. 10-1/2"H and 18"D. Weight 130 lb. **\$6,000.00**