

MC 3500

MONAURAL POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Black and anodized aluminum panel. Illuminated **METER:** monitors **OUTPUT VOLTAGE, DECIBELS** or **CATHODE CURRENT** for each output tube. ⚡ **INPUT** connectors: **RCA** and **BNC**. **GAIN CONTROL**. **METER RANGE SWITCH:** **OFF, VOLTS, dB, dB-10** or **V1-V8**. **POWER CIRCUIT BREAKER:** **ON** or **OFF**. **OUTPUT RANGE SWITCH:** **1, 4, 8, 16, 50, and 64 OHMS** with corresponding voltages **17.3, 35.8, 53.0, 75.0, 132** and **150V**. Dual banana **OUTPUT** connectors. Heavy duty handles.



BACK PANEL: Cooling fan. ⚡ **Power cord** receptacle. **FUSE**. **LINE VOLTAGE SWITCH:** **117** or **125V**. Speaker **OUTPUT 1** and **2** barrier strip. **TRANSFORMER INPUT**. Audio **INPUT 1** and **2** terminals. **SUBSONIC FILTER** switch: **OUT** or **IN**.

TUBES: 8-**6LQ6/6JE6B** output, 2-**12AX7/ECC83**, 2-**6DJ8/ECC88**, **6CG7/6FQ7** and **6BL7GTA**. Solid state rectifier bridge.


MC 3500

MONAURAL POWER AMPLIFIER

McIntosh

The Compendium

SPECIFICATIONS: 350w. Response 20-20kHz (+0 -0.5dB). Distortion 0.15%. Noise & hum - 95dB. Output impedance 1, 4, 8, 16, 50 and 64 ohms. All impedances can be isolated from ground. Internal impedance less than 5% of rated impedance. Input impedance 200k. Input sensitivity 1.1V.

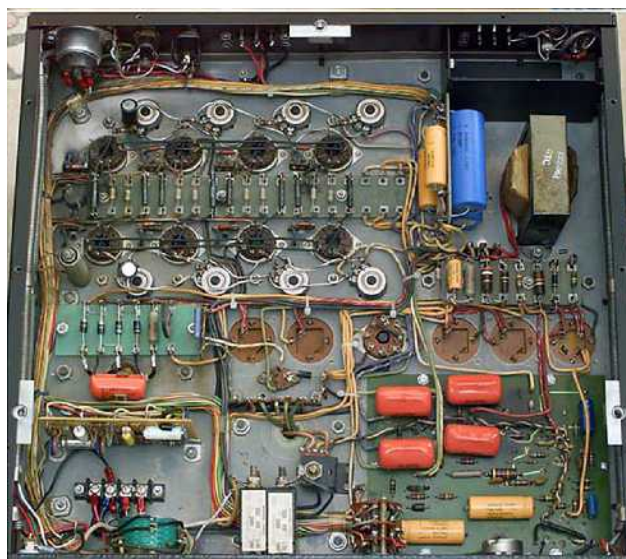

MC 3500 - Sold from February 1968 - June 1971. S/N: 10N01~11N95 (193 UNITS)
Size 19" rack mounting. 10-1/2"H, and 17"D behind panel. Weight 125 lb. **\$1,099.00**