

MC 2500

STEREO POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Gold and black anodized aluminum panel or black anodized aluminum panel. Illuminated left and right power level meters (linear WATTS or DECIBELS). LEFT and RIGHT POWER GUARD lamps: LIMIT or NORMAL. ⚡ LEFT GAIN control. METER RANGE SWITCH: -20, -10, 0, WATTS and HOLD. SPEAKERS switch: OFF or ON. RIGHT/MONO GAIN control. HEADPHONES jack. POWER switch: ON or OFF. Handles.



BACK PANEL: Dual cooling fans. ⚡ Power cord receptacle. FANS switch: thermally switched LO, HI or CONTINUOUS HI. LEFT and RIGHT speaker OUTPUT barrier strips. MODE switch: STEREO, MONO BRIDGE or MONO PARALLEL. Left and Right (MONO) audio INPUT. INPUT LEVEL switch: 2.5v or .75v.


SPECIFICATIONS: 500w/ch. (1000w mono). Response 20-20kHz (+0 -0.25dB). Distortion 0.02%. Noise and hum -95dB. Output impedance 1, 2, 4, and 8 ohms. (0.5, 1, 2, 4, 8 and 16 ohms in mono). Damping factor 30 or greater. Input impedance 50k. Input sensitivity 0.75v or 2.5v. Sentry Monitor. Power Guard.



MC 2500

STEREO POWER AMPLIFIER

McIntosh
The Compendium

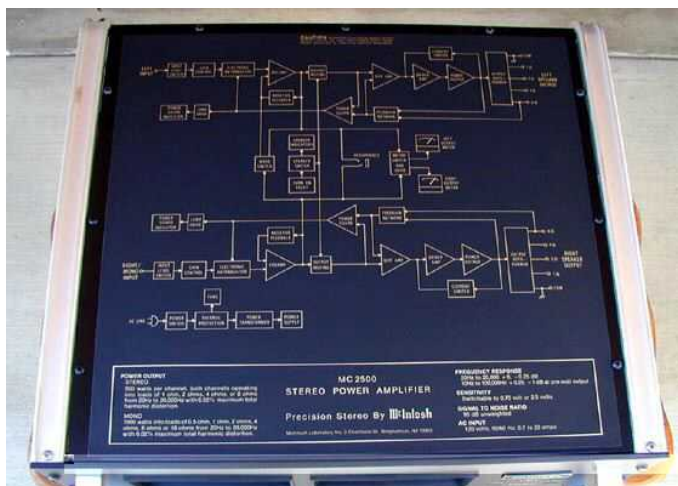

MC 2500 - Sold from October 1980 - 1990. S/N: CS1001~CS????

Size 19" rack mounting. 10-1/2"H and 17"D. Weight 129 lb. **\$3,800.00**