

MC 2505

STEREO POWER AMPLIFIER

McIntosh

The Compendium




FRONT PANEL: Glass with illuminated teal/gold nomenclature. Illuminated left and right POWER LEVEL meters (meters read 0 at 50W). Power indicator light. ⚡ LEFT GAIN control. METER RANGE switch: -20, -10, 0, and OFF. RIGHT GAIN control. HEADPHONES jack. SPEAKERS switch: OFF or ON. POWER switch: OFF or ON. PANLOC buttons.



BACK PANEL: Power cord. AC OUTLET. CIRCUIT BREAKER. LEFT and RIGHT speaker OUTPUT barrier strips. LEFT and RIGHT audio INPUTS. Panloc mounting.

SPECIFICATIONS: 50w/ch. Response 20-20kHz (+0 -0.25dB). Distortion 0.25%. Noise and hum - 90dB. Output impedance 4, 8 and 16 ohms. Damping actor 10. Input impedance 200k. Input sensitivity 0.5v. Headphone impedance 4 to 600 ohms. Sentry Monitor.

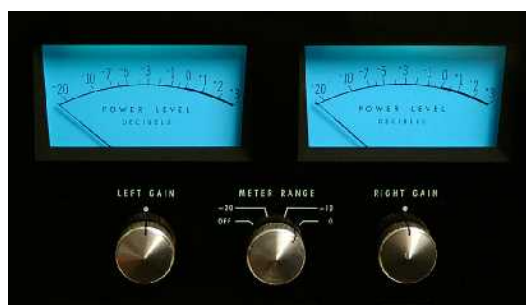

MC 2505

STEREO POWER AMPLIFIER

McIntosh

The Compendium



MC 2505 - Sold from January 1967 - December 1977. S/N: 10K01~99K99 & AT1001~AT3424 (11,421 UNITS)

Size 5-7/16"H, 16"W and 13"D. Weight 38 lb. **\$549.00**