

# MC 275

## STEREO POWER AMPLIFIER

# McIntosh

## The Compendium



**CONTROLS & CONNECTORS:** Chrome/black chassis. FUSE. Line OUTPUTS octal socket for 70V/600 OHM output. Speaker OUTPUT: Left and Right barrier strips for 4, 8 and 16 ohms. Input switch: STEREO, TWIN AMP or MONO. GAIN CONTROLS: TWIN AMP, BALANCE and MONO. ⚡ Power cord. 300W A.C. ONLY outlet. LINE VOLTAGE switch: 117 or 125V. Audio INPUT: STEREO, TWIN and MONO.



**SPECIFICATIONS:** 75w/ch stereo, 150w mono. Response 16-40kHz (+0 -0.1dB). Distortion 0.5%. Noise & hum -90dB. Output impedance 4, 8, 16, 67 and 600 ohms. 600 ohm center tap internally grounded. (2, 4, 8, 16 and 32 ohms in mono). Output voltages 25V (isolated), 70.7V (one side grounded) and 230V (center tap grounded). Internal impedance less than 10% of rated impedance. Input impedance 250k. Input sensitivity: 0.5V (in mono or twin amp). 2.0V in stereo.


**TUBES:** 4-KT88/6550 output, 12AX7, 2-12AU7, 2-12AZ7, 2-12BH7. Solid state rectifier bridge.



# MC 275

**STEREO POWER AMPLIFIER**

**McIntosh**  
The Compendium

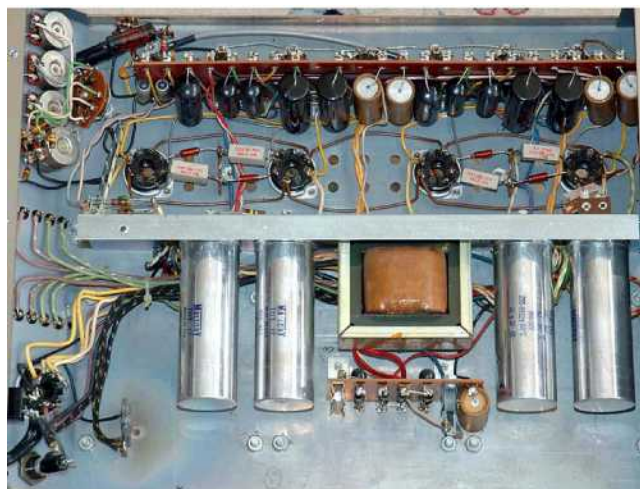

**MC 275** - Sold from May 1961 - 1970. S/N: 10,001~10,147 & 100E1~572E9 (8,610 UNITS)  
Size 8"H, 12-1/4"W and 17-1/4"D. Weight 76 lb. **\$444.00**