

MC 2KW


MONAURAL POWER AMPLIFIER

McIntosh

The Compendium



OUTPUT MODULE FRONT PANEL: LED/fiber-optic illuminated green/gold nomenclature. Illuminated POWER OUTPUT meter (linear WATTS or DECIBELS). POWER GUARD LED. ⚡ METER mode switch: LIGHTS OFF, WATTS or HOLD. POWER switch: OFF, REMOTE or ON. Handles.

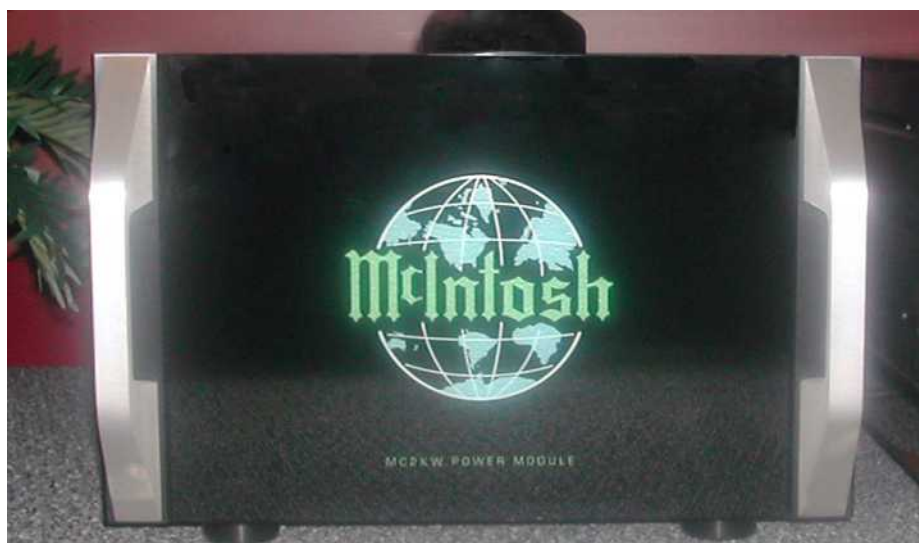

POWER MODULES FRONT PANEL: LED/fiber-optic illuminated green/blue/white McIntosh logo and nomenclature. Handles.

OUTPUT MODULE BACK PANEL: Speaker OUTPUTS connectors: 2 Ω - A, B and C. ⚡ Speaker OUTPUTS connectors: 4 Ω - A, B and C. ⚡ Speaker OUTPUTS connectors: 8 Ω - A, B and C. ⚡ Polished stainless steel chassis. MAIN FUSE. ⚡ Power cord receptacle. TO POWER MODULE (A) 16 pin connector 1 and 2. POWER CONTROL jacks: IN and OUT. BALANCED audio OUTPUT. 2 BALANCED audio INPUTS. INPUT

MC 2KW

MONAURAL POWER AMPLIFIER

McIntosh

The Compendium

MODE switch: BALANCED or UNBALANCED. UNBALANCED INPUT and OUTPUT. TO POWER MODULE (B) 16 pin connector 1 and 2.

POWER MODULE BACK PANEL: Polished stainless steel chassis. Power cord receptacle. CIRCUIT BREAKER. TO OUTPUT MODULE (1) 16 pin connector. TO OUTPUT MODULE (2) 16 pin connector.

SPECIFICATIONS: 2000w into 2, 4 or 8 ohms. Response 20-20kHz (+0 -0.25dB). Response 10-100kHz (+0 -3 dB). Distortion 0.005%. Noise and hum -123dBA unbalanced, -127dBA balanced. Output impedance 2, 4 or 8 ohms. Damping factor >40. Input impedance 10k balanced. Input sensitivity 2.5v unbalanced, and 5v balanced. Dynamic headroom: 2 dB. *Sentry Monitor. Power Guard.* Power requirements 120V at 12 Amps.



MC 2KW - Sold from October 2005 - . S/N: ?????~?????

Output Module Size 12-5/16"H, 17-3/4"W and 26-5/8"D. Weight 121 lb.

Power Module (2 each) Size 12-5/16"H, 17-3/4"W and 26-5/8"D. Weight 158 lb.

\$30,000.00