


MC 402

STEREO POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Glass with LED/fiber-optic illuminated teal/gold nomenclature. Illuminated left and right **POWER OUTPUT** meters (linear **WATTS** or **DECIBELS**). Left and right **POWER GUARD** lights. Remote ON indicator light. ⚡ **METER** switch: **LIGHTS OFF**, **WATTS** or **HOLD**. **POWER** switch: **OFF**, **REMOTE** or **ON**.

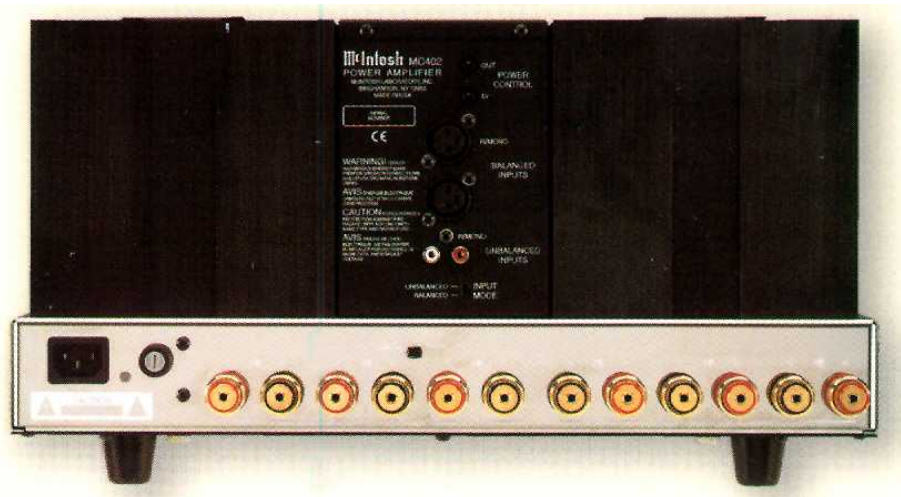


BACK PANEL: **POWER CONTROL** jacks: **OUT** and **IN**. **BALANCED** Right/MONO and Left **INPUTS**. **UNBALANCED** Left and Right/MONO **INPUTS**. **INPUT MODE:** **UNBALANCED** or **BALANCED**. ⚡ Polished stainless steel chassis. Power cord receptacle. **FUSE**. **RIGHT** channel **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers. **LEFT** channel **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers.

SPECIFICATIONS: **400w/ch.** (**800w** mono). Response 20-20kHz (+0 -0.25dB). Distortion 0.005%. Signal to Noise Ratio -124dBa balanced, -120dBa unbalanced. Output impedance 2, 4, or 8 ohms stereo, 1, 2 or 4 ohms mono. Damping factor >40. Input impedance 10K balanced and 20K unbalanced. Input sensitivity 4v balanced and 2.0v unbalanced. Dynamic headroom 2.1 dB. *Sentry Monitor*. *Power Guard*. Power requirements 120V at 10 Amps.

MC 402

STEREO POWER AMPLIFIER

McIntosh
The Compendium

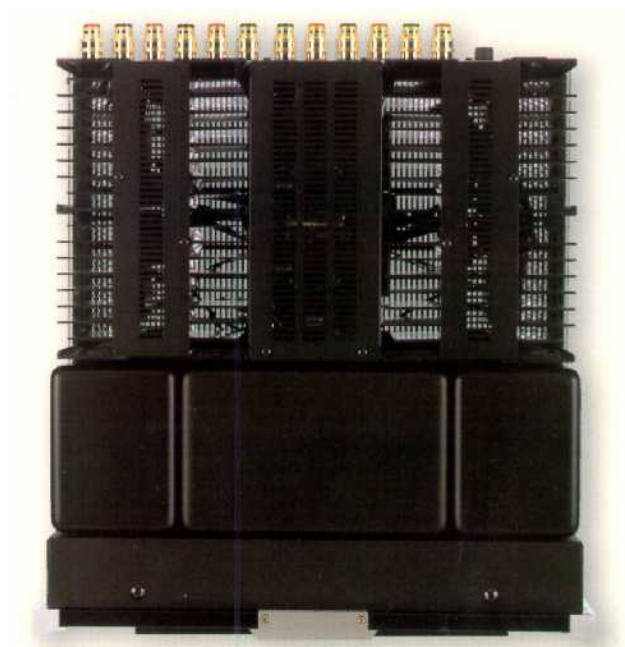

MC 402 - Sold from 2003 - . S/N: ?????~?????

Size 9-7/16"H, 17-1/2"W and 20"D. Weight 110-1/2 lb. **\$5,100.00**