

C 32

STEREO PRE-AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. LISTEN SELECTOR: AUX, TUNER, TAPE 1, TAPE 2, TAPE 3, PHONO. MODE SELECTOR: L TO L+R, R TO L+R, STEREO REVERSE, STEREO, MONO (L+R), L+R TO L and L+R TO R. Program EQUALIZER FREQUENCY controls: 30, 150, 500, 1500 and 10K. VOLUME. ⚡ RECORD SELECTOR: AUX, TUNER, TAPE 1, TAPE 2, TAPE 3, PHONO. TAPE 3 INPUT and OUTPUT jacks. Pushbutton switches (with indicator lights): PHONO: 1 or 2, RECORD MONITOR: IN or OUT, EQ: IN or OUT, FILTERS: LF: IN or OUT, HF: IN or OUT, SPEAKER/OUTPUT: 1 IN or OUT, 2: IN or OUT. POWER: ON or OFF. 2 HEADPHONES jacks. EXPANDER: OFF to 2.0. Concentric BALANCE: L to R / LOUDNESS: FLAT to MAX. PANLOC buttons.



BACK PANEL: OUTPUTS: 2, 1, MAIN, LINE, TAPE 3, TAPE 2, TAPE 1. INPUTS: TAPE 3, TAPE 2, TAPE 1, TUNER, AUX, PHONO 2, PHONO 1. ⚡ Power cord. FUSE. AC outlets: 4 SWITCHED. TURNTABLE POWER: auto-on 2 unswitched AC outlets, AUTO-MANUAL switch, FUSE. Push terminals for Left and Right MONITOR amplifier speaker OUTPUT. GROUND binding post. SPEAKER CONTROL RELAY socket. Panloc mounting.



TOP PANEL: MONITOR AMPLIFIER CONTROLS: LEFT GAIN, INPUT switch: RECORD or LISTEN and RIGHT GAIN. EXPANDER controls: LEVEL MATCH, SPEED: FAST, NORM and SLOW.


C 32

STEREO PRE-AMPLIFIER

McIntosh

The Compendium

SPECIFICATIONS: Response 20-20kHz (+0 -0.5dB). Distortion 0.05%. Noise and hum - 90dB Aux, -80dB Phono. Output rated 2.5v. Output impedance 220 ohms. Load impedance 5k. Input sensitivity and impedance: Aux 0.25V at 50k, Phono 2mV at 47k and 65pF. Program equalizer: 30, 150, 500, 1500 and 10,000Hz boost or cut 12dB. Headphone amplifier **12W/ch** into 8 ohms at 0.1% distortion. LF filter 50Hz at 12dB/octave. HF filter 7kHz at 12dB/octave. Voltage gain 20dB Aux, 62dB Phono.

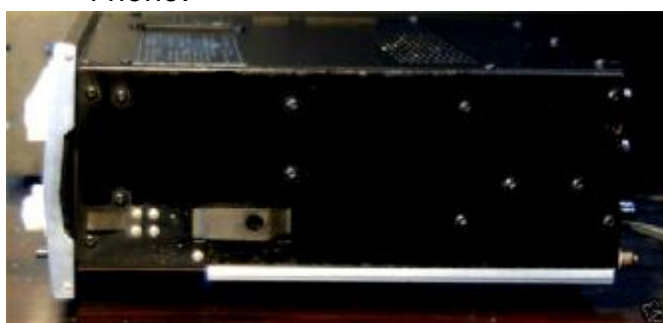

C 32 - Sold from May 1977 - March 1982. S/N: AY1001~AY9600 (8,599 UNITS)

Size 5-7/16"H, 16"W and 13"D behind panel. Weight 27 lb. **\$1,649.00**