

C 4

MONAURAL PRE-AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Brass finish. SELECTOR: TAPE, TUNER, MIC, PHONO 1, PHONO 2. COMP: 629.16, 629.11, 800.16, 800.10. BASS boost: 0 to 5, cut: 0 to 5. TREBLE boost: 0 to 5, cut: 0 to 5. VOLUME: 1 to 10 with on-OFF switch. ⚡ Power indicator light.



REAR PANEL: Octal power and audio output socket. OUTPUTS: TAPE and MAIN. Tube cover. PHONO 2 LOAD switch: 6.8K to 52K. ⚡ 3 switched AC outlets. Power cord. INPUTS (with level controls): TAPE, TUNER, MIC, PHONO 1 and PHONO 2.

SPECIFICATIONS: Powered by **McIntosh** tube amplifiers. Response 20-20kHz. Distortion 0.3%. Noise and hum -110dB high level, 2uV phono. Output; main 2.5V, 0.5V tape. Input sensitivity and impedance: high level 0.5V at 500k, phono 1 (5mV at 100k), phono 2 (5mV at variable 6.8k to 52k).

TUBES: 3-12AX7.




C 4

MONAURAL PRE-AMPLIFIER

McIntosh

The Compendium

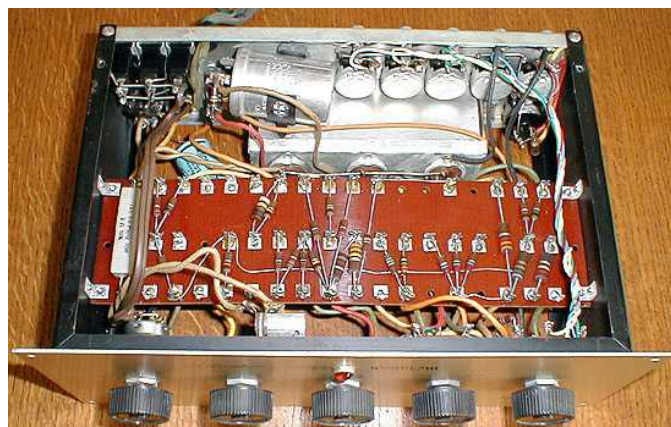

C 4 - Sold from 1954 - March 1959. S/N: 5,000~7,552 & 1A001~2A184 (3,734 UNITS)
Size 3-9/16"H, 10-1/8"W and 9"D. Weight 7 lb, 4 oz. **\$64.50**. **C 4B** (with blonde cabinet **\$74.50**). **C 4M** (with mahogany cabinet **\$74.50**)