

20 W2


MONAURAL POWER AMPLIFIER

McIntosh

The Compendium



CONTROLS & CONNECTORS: Gray hammer tone finish. Octal socket powers McIntosh **AE 2** and **C 104** preamps.

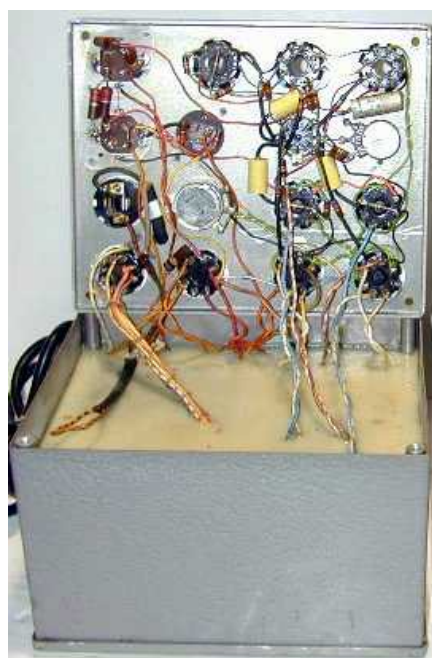

SPECIFICATIONS: 20w. Response 20-20kHz (+0.1 -0.1dB). Distortion less than 1.0%. Noise & Hum -85dB. Output impedance 4, 8, 16, 32 and 600 ohms balanced. Damping factor 10 or greater for 4, 8, 16 and 32 ohms. Input impedance 100k. (with input transformer, 50, 250, or 600 ohms or bridging 20k).

TUBES: 2-6V6-GT output, 2-12AX7, 2-6J5, 5Y3.

20 W2 - Sold from January 1951 - 1954. S/N: 600 - 3,634 (3,034 UNITS)

Size 8-1/8"H, 6-3/4"W and 5-1/4"D. Shipping weight: 27 lb. **\$149.50**