

MC 100

MONAURAL POWER AMPLIFIER

McIntosh

The Compendium



CONTROLS & CONNECTORS: Chrome/black chassis. FUSE. Speaker OUTPUT barrier strip for 4, 8 and 16 OHMS. GAIN control. ⚡ Power cord. AC outlet. Audio INPUT.




SPECIFICATIONS: 100w. Response 20-20kHz (+0 -0.25dB). Distortion 0.2%. Noise and hum - 90dB. Output impedance 4, 8 and 16 ohms. Damping factor 12. Input impedance 200k. Input sensitivity 0.5v. *Sentry Monitor*.

MC 100

MONAURAL POWER AMPLIFIER

McIntosh
The Compendium

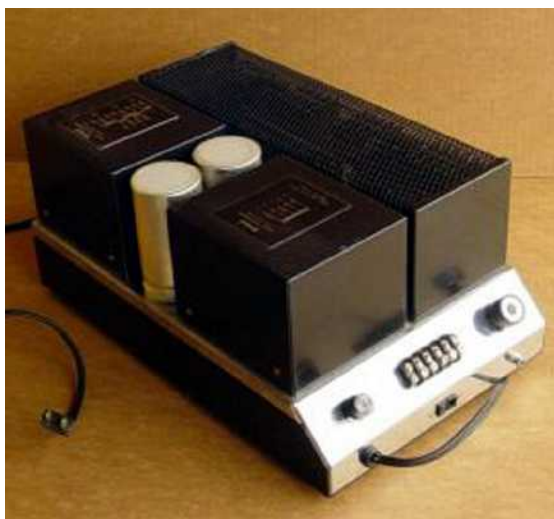

MC 100 - Sold from November 1970 - February 1973. S/N: 1S001~1S369 (368 UNITS)
Size 6- 1/2"H, 9-1/4"W and 14-3/4"D. Weight 32 lb. **\$299.00**