

MC 1201

MONAURAL POWER AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. Illuminated **POWER OUTPUT** meter (linear **WATTS** or **DECIBELS**). **POWER GUARD** light. Remote ON indicator light. ⚡ **METER** switch: **LIGHTS OFF**, **WATTS** or **HOLD**. **POWER** switch: **OFF**, **REMOTE** or **ON**. Handles.




BACK PANEL: **POWER CONTROL** jacks: **OUT** and **IN**. **BALANCED** audio **INPUT**. **UNBALANCED** audio **INPUT**. **INPUT MODE** switch: **UNBALANCED** or **BALANCED**. ⚡ Polished stainless steel chassis. **CIRCUIT BREAKER**. **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers. Power cord receptacle.

SPECIFICATIONS: **1200w** into 2, 4 or 8 ohms. Response 20-20kHz (+0 -0.25dB). Distortion 0.005%. Signal to Noise Ratio -124dBA balanced, -120dBA unbalanced. Output impedance 2, 4, or 8 ohms. Damping factor 100 at 8 ohms. Input impedance 10K ohms. Input sensitivity 4.9v balanced and 2.45v unbalanced. Dynamic headroom 2.1 dB. *Sentry Monitor*. *Power Guard*. Power requirements 120V at 15 Amps.

MC 1201

MONAURAL POWER AMPLIFIER

McIntosh
The Compendium

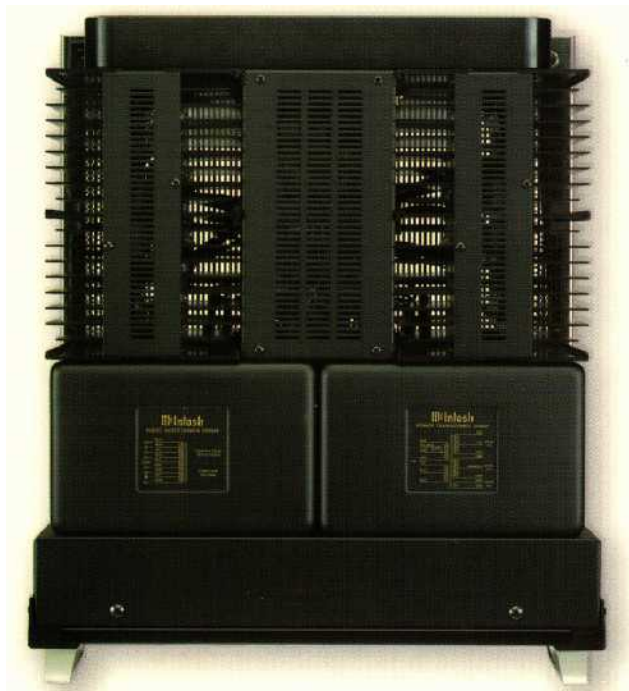

MC 1201 - Sold from 2002 - . S/N: ?????~?????

Size 11"H, 17-3/4"W and 19.63"D. Weight 147 lbs.

\$7,600.00