

MC 250

STEREO POWER AMPLIFIER

McIntosh

The Compendium



CONTROLS & CONNECTORS: Chrome/black chassis. CIRCUIT BREAKER. Octal OUTPUT socket. LEFT and RIGHT speaker OUTPUT barrier strips for 4, 8 and 16 OHMS. MONO/STEREO switch. LEFT and RIGHT/MONO GAIN CONTROLS. ⚡ Power cord. AC outlet. Left and Right audio INPUTS.




SPECIFICATIONS: 50w/ch stereo. 100w mono. Response 20-20kHz (+0 -0.25dB). Distortion 0.25%. Noise and hum -90dB. Output impedance 4, 8 and 16 ohms (2, 4 and 8 ohms mono). Damping factor 10. Input impedance 200k Input sensitivity 0.5v. Sentry Monitor.



MC 250

STEREO POWER AMPLIFIER

McIntosh
The Compendium

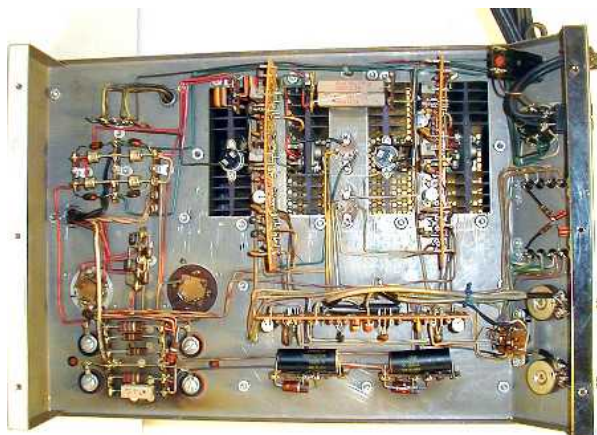

MC 250 - Sold from March 1967 - May 1979. S/N: 10L01~91L43 (7,883 UNITS)
Size 7-1/16"H, 10-5/8"W and 15-5/8"D. Weight 35 lb. **\$429.00**