

C 8P

MONAURAL PRE-AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Brass Finish. RUMBLE FILTER: 1 to 5. RECORD COMPENSATOR: turnover (bass) 950, 750, 580, 400, 280, rolloff (treble) 5, 10, 15, 20, 25. AURAL COMP: 1 to 5. ⚡ SELECTOR: TAPE, TUNER, MIC, PHONO 1, PHONO 2. BASS boost: 0 to 5, cut: 0 to 5. Power indicator light. TREBLE boost: 0 to 5, cut: 0 to 5. VOLUME: 1 to 10 with on-OFF switch.



BACK PANEL: Octal power and audio output socket. OUTPUTS: TAPE and MAIN. Tube cover. PHONO 2 LOAD control: F.M., 2K, 7K, 36K, 47K, 52K. ⚡ 3 switched AC outlets. Power cord. INPUTS (with level controls): TAPE, TUNER, MIC, PHONO 1 and PHONO 2.

SPECIFICATIONS: Self powered with **D 8** power supply. Response 20-20kHz. Distortion 0.3%. Noise and hum -80dB high level, 2uV phono. Output; main 2.5V, 0.5V tape. Input sensitivity and impedance: high level 0.5V at 500k, phono 1 (5mV at 100k), phono 2 (5mV at variable 6.8k to 52k).



TUBES: 3-12AX7. Solid state rectifier.

C 8P

MONAURAL PRE-AMPLIFIER

McIntosh

The Compendium

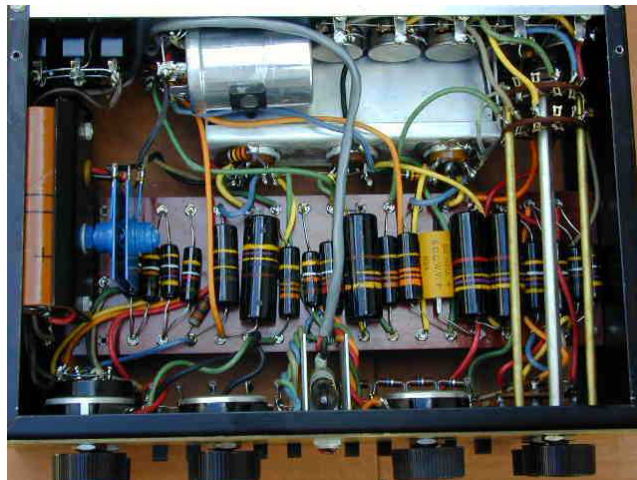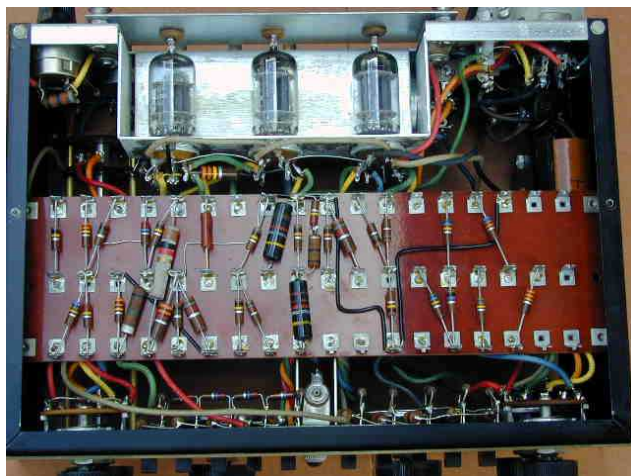

D 8 - Power supply for **C 8** preamplifier. Tube: 5Y3GT

D 8A - Power supply for **C 8** preamplifier. Solid state. Replaced **D 8**.

D 8:



D 8A:



C 8P - Sold from November 1955 - February 1959. S/N: 5,000~15,658 & 1B001~4B601 (14,257 UNITS)

Size: 3-9/16"H, 10-1/8"W and 9"D. Weight 8 lb, 2 oz. **\$99.50**. **C 8PB** (**C 8** with Blonde cabinet **\$107.50**). **C 8PM** (**C 8** with mahogany cabinet **\$107.50**)

D 8 - Size 2-1/4"H, 6"W and 4-7/8"D. Weight 3 lb, 6 oz.