

C 8S


MONAURAL PRE-AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Brass Finish. RUMBLE FILTER: 1 to 5. RECORD COMPENSATOR: turnover (bass) 950, 750, 580, 400, 280, rolloff (treble) 5, 10, 15, 20, 25. AURAL COMP: 1 to 5. ⚡ SELECTOR: TAPE, TUNER, TAPE HEAD, PHONO 1, PHONO 2. TONE: concentric BASS and TREBLE: boost: 0 to 5, cut: 0 to 5. Power indicator light. STEREO: concentric MODE: REVERSE, STEREO, NORM, L, R, MON / BALANCE: left and right 0 to 5. VOLUME: 1 to 10 with on-OFF switch.

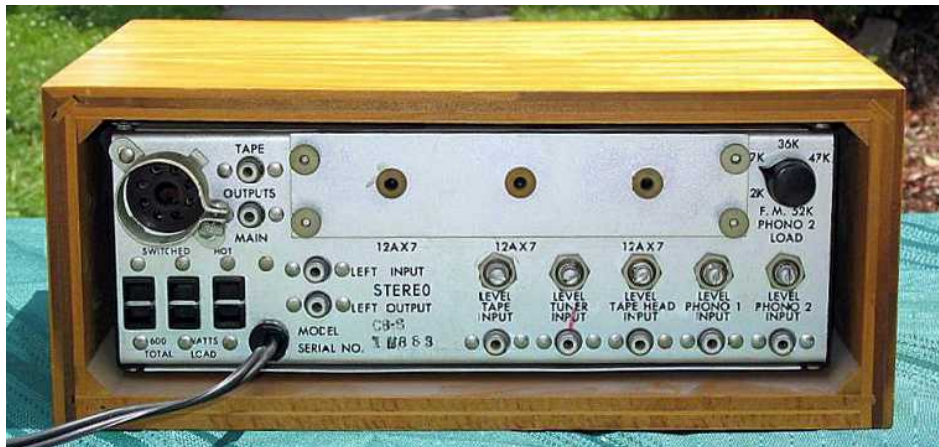

BACK PANEL: Octal power and audio output socket. OUTPUTS: TAPE and MAIN. Tube cover. PHONO 2 LOAD control: F.M., 2K, 7K, 36K, 47K, 52K. ⚡ 3 switched AC outlets. Power cord. STEREO LEFT INPUT and OUTPUT. INPUTS (with level controls): TAPE, TUNER, TAPE HEAD, PHONO 1 and PHONO 2.

SPECIFICATIONS: Mono with stereo volume and balance controls. Response 20-20kHz. Distortion 0.3%. Noise and hum -80dB high level, 2uV phono. Output rated 2.5V. Input sensitivity and impedance: high level 0.5V at 500k, phono 1 5mV at 100k, phono 2 variable 6.8k to 52k.

TUBES: 3-12AX7.

C 8S - Sold from July 1958 - February 1961. S/N: 1M001~2M739 (1,737 UNITS)

Size: 4-1/4"H, 11"W and 7-1/2"D. Weight 11 lb. Shipping weight 5 lb. **C 8SB** (with blond cabinet **\$109.00**). **C 8SM** (with mahogany cabinet **\$109.00**). **C 8SW** (with walnut cabinet **\$109.00**)