

MC 501


MONAURAL POWER AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Glass with LED/fiber-optic illuminated green/gold nomenclature. Illuminated **POWER OUTPUT** meter (linear **WATTS** or **DECIBELS**). **POWER GUARD** light. ⚡ **METER** switch: **LIGHTS OFF**, **WATTS** or **HOLD**. Remote **ON** indicator light. **POWER** switch: **OFF**, **REMOTE** or **ON**. Handles.

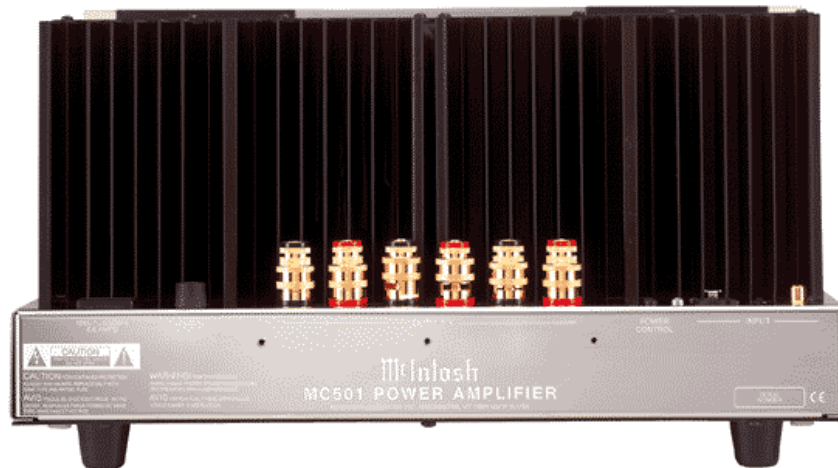

BACK PANEL: Polished stainless steel chassis. Power cord receptacle. **FUSE**. **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers. **POWER CONTROL** jacks: **OUT** and **IN**. **BALANCED** audio **INPUT**. **INPUT MODE** switch: **BALANCED** or **UNBALANCED**. **UNBALANCED** audio **INPUT**.

SPECIFICATIONS: **500w** into 2, 4 or 8 ohms. Response 20-20kHz (+0 -0.25dB). Distortion 0.005%. Signal to Noise Ratio -124dBA balanced and unbalanced. Output impedance 2, 4, or 8 ohms. Damping factor 100 at 8 ohms. Input impedance 20K ohms balanced and 10K ohms unbalanced. Input sensitivity 4.2v balanced and 2.1v unbalanced. Dynamic headroom 1.8 dB. *Sentry Monitor*. *Power Guard*. Power requirements 120V at 6.6 Amps.

MC 501

MONAURAL POWER AMPLIFIER

McIntosh

The Compendium

MC 501 - Sold from 200? - . S/N: ?????~?????

Size 8-13/16"H, 17-1/2"W and 14-13/16"D. Weight 105-1/2 lbs. **\$4,100.00**